Technical Data Sheet



PA418 SERIES POWER TAKE-OFF

Deep Reach High Torque 8 Bolt Side Mounted PTO

The 418 series is designed for the left opening of certain Isuzu transmissions with an 8 bolt opening. It is a heavy-duty deep reach design.

Suits:


Isuzu MZW6P manual & AMT transmissions. (Refer to the eGuide Configurator on www.hydreco.com for confirmation and details)

Product Features


- Output Speed 91% of Engine Speed For very high torque at the output.
- Wide variety of outputs To suit many vehicle configurations.
- Constant mesh gears Less potential for gearbox damage through misuse.
- Heavy duty tapered roller bearings For long life and better support of the idler gear.



Technical Data Sheet

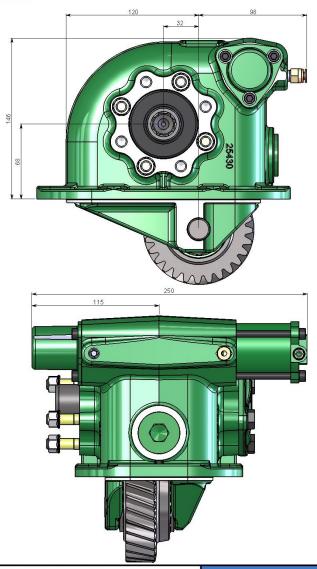

PTO DESIGNATION CODES

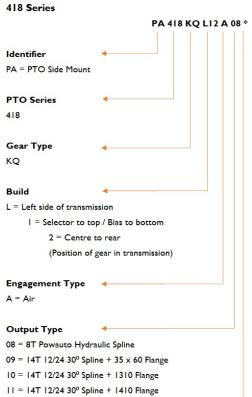

- 13 = 13T SAE B Hydraulic Spline + SAE B Pump Mount
- 23 = 8T Ø36 DIN 5462 Spline Female and DIN Mount
- 25 = 9T SAE A Hydraulic Spline + SAE A Pump Mount
- Other outputs available on request, subject to MOQ.

Manufacturers Code 🔸

- A = With Pressure Switch
- B = With Mounting Kit

POWAUTO

C = With Mounting Kit & PTO Control Kit

Technical Specifications Ratings & Service Parts		
Torque	Nm / ft.lb	460 / 340
Power @ 500 rpm	kW / hp	24.0 / 32.2
Power @ 1000 rpm	kW / hp	48.0 / 64.3
Output Shaft Rotation		Same as Engine
Approximate Bare Mass	kg / lb	15.0 / 33.0
Mounting Kit		MK1190
Mounting Gasket Kit		GK027
Seal Kit		SK088
Bearing Kit		BK088

HYDRECO

ADVANCED HYDRAULIC TECHNOLOGIES

Note: For full details refer to the owners manual or the eGuide configurator found at www.hydreco.com/solutions/ on-road

Doc: PA418-04/20



POWAUTO

HYDRAULICS

HYDRECO®